

GEA MINIMAL IP40

IP40 IK06 CE

TIPOLOGIA / TYPOLOGY


Incasso | Recessed

POSIZIONE INSTALLATIVA | INSTALLATION POSITION

A soffitto | Ceiling mounting

AMBIENTE INSTALLATIVO | INSTALLATION LOCATION

Interno | Indoor

Prodotto con cassaforma
Product with housing box

◆ GEA MINIMAL IP40 - XS

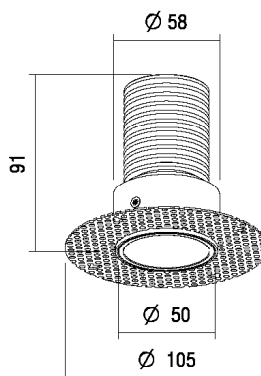
6W



kg 0,13



40 mm

Prodotto con cassaforma
Product with housing box

□ GEA MINIMAL IP40 - S

12W



kg 0,42



60 mm

GEA MINIMAL IP40

CARATTERISTICHE ELETTRICHE | ELECTRICAL FEATURES

POTENZA ASSORBITA POWER CONSUMPTION	XS version: 6W - S version: 12W
ALIMENTAZIONE POWER SUPPLY	XS version: C.C. - 230Vac - S version: 230Vac
ALIMENTATORE POWER SUPPLY UNIT	XS version C.C.: 6W - 500mA Non incluso <i>Not included</i> XS version 230Vac: Incluso <i>Included</i> S version: 230Vac Incluso <i>Included</i>
DIMMERAZIONE DIMMING	Dimmerabile Push, DMX, DALI, 1-10V, taglio di fase (solo versione XS) <i>Push, DMX, DALI, 1-10V, phase cut dimmable (only XS version)</i>
COLLEGAMENTO CONNECTION	C.C.: Serie <i>Series</i> - 230Vac: Tensione di rete <i>Mains voltage</i>

CARATTERISTICHE ILLUMINOTECNICHE | LIGHTING FEATURES

COLORE LED LED COLOUR	XS version: Amber, 2200K, 2700K, 3000K, 4000K S version: 2700K, 3000K, 4000K
INDICE RESA CROMATICA CRI CRI	>90
OTTICHE OPTICS	XS version: 10°, 36°, 60° - S version: 28°, 58°, Diffused
UGR	XS version: <16 - S version: <19
FLUSSO TOTALE NOMINALE TOTAL NOMINAL LUMENS	XS: 600lm (2700K) 648lm (3000K) 660lm (4000K) S: 1548lm (2700K) 1584lm (3000K) 1620lm (4000K)
DURATA MEDIA LED AVERAGE LED LIFE	50.000h L80 B10

CARATTERISTICHE MECCANICHE | MECHANICAL FEATURES

PESO WEIGHT	XS version: Kg 0,13 - S version: Kg 0,42
FINITURE FINISHES	Bianco txt, Grigio txt, Nero txt <i>txt White, txt Grey, txt Black</i>
INSTALLAZIONE INSTALLATION	A incasso su cartongesso con cassaforma a rasare (inclusa) <i>Recessed flush-mounting on plasterboard with housing box (included)</i>
MATERIALE MATERIAL	Corpo in alluminio verniciato, dissipatore in alluminio anodizzato, diffusore in PMMA opalino <i>Varnished aluminium body, anodized aluminium heatsink, opal PMMA diffuser</i>

CARATTERISTICHE GENERALI | GENERAL FEATURES

TEMPERATURA DI ESERCIZIO OPERATING TEMPERATURE	-10°C +45°C
GRADO DI PROTEZIONE INGRESS PROTECTION	IP40
GRADO DI RESISTENZA IMPACT RESISTANCE	IK06
GLOW WIRE TEST GLOW WIRE TEST	960°C
TEMPERATURA SCHERMO SCREEN TEMPERATURE	40° @ Ta = 25°
CLASSE DI ISOLAMENTO APPLIANCE CLASS	III (XS version) - II (S version)
CALPESTABILE WALKOVER	/
CARRABILE DRIVE OVER	/
CAVI DI ALIMENTAZIONE POWER CABLES	Fornito con 25 cm di cavo <i>Provided with 25cm cable</i>
SICUREZZA STANDARD STANDARD SAFETY	/
SICUREZZA FOTOBIOLOGICA PHOTOBIOLOGICAL SAFETY	GR1